



## FT 8306


Avery Dennison FT 8306 is a 3.6 mil double coated polyester with a rubber adhesive on the laminating side and a removable acrylic adhesive on the mounting side. It is designed for temporary bonding of a wide variety of materials. FT 8306 is commonly used for signage and graphics and general industrial applications where short term removability is required.

### FEATURES

- Double coated tape construction with a Removable adhesive system
- Low adhesion, low tack acrylic adhesive on mounting side
- Multipurpose rubber adhesive on laminating side
- Polyester film carrier
- Super calendered kraft release liner

### BENEFITS

- Dimensional stability and good die cutting characteristics
- Low initial bond for temporary removability
- Strong bond to a wide variety of materials and excellent foam bonding performance
- High tensile strength and good converting performance
- High tear resistance with excellent die cutting performance
- Two-year warranty

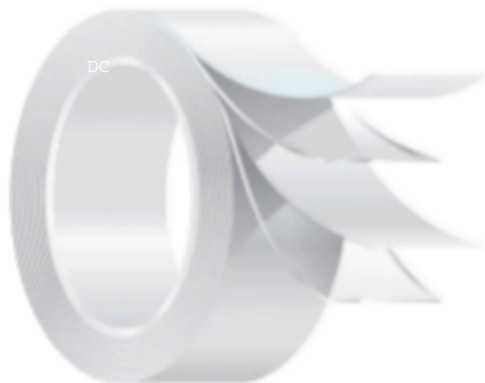

### CONSTRUCTION:

**Liner:**

60# White Kraft

**Adhesive 1:**

Removable Acrylic Acrylic Acrylic Acrylic Acrylic Acrylic

**Carrier:**

Polyester

**Adhesive 2:**

Rubber

**FT 8306**

Adhesive Properties:		Typical Values		
Thickness	ASTM D3652	US Mil's	MM's	Micron's (µm)
Liner		3.5	0.09	89
Adhesive 1 - Liner		0.8	0.02	20
Carrier		0.5	0.01	13
Adhesive 2 - Unwind		2.3	0.06	58
Total Caliper without Liner:		3.6	0.09	91
Total Caliper:		7.1	0.18	180

Peel Adhesion		ASTM D3330		
180° 12 in (300 mm) min @ Room Temp				
Substrate			Lbf / in	N / Meter
SS	Liner	72 hr dwell	1.0	176
	Unwind		9.0	1,585
ABS	Liner	72 hr dwell	3.5	616

Loop Tack		ASTM D6195		
180° 30 in (508 mm) / min @ Room Temp				
Substrate			Lbf / in	N / Meter
SS	Liner	Initial	1.0	176

Static Shear		ASTM D3654		
180° 1" sq (6.5 cm2) 500 g @ Room Temp				
Substrate			Min to Fail	
SS	Liner	24 hr dwell	> 10,000	

TEMPERATURES	° F	° C
Minimum Application Temperature	50° F	10° C
Minimum Service Temperature	-40° F	-40° C
Maximum Service Temperature	175° F	80° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

**APPLICATION TECHNIQUES**

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

**STORAGE / SHELF LIFE**

- Two years when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to [Tapes.AveryDennison.com](http://Tapes.AveryDennison.com) for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2022 Avery Dennison® Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison® Corporation. All other Avery Dennison® brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison® Corporation.



Asia Pacific  
Kunshan, China,  
NO. 618 Nanhe Road  
Kunshan Economic &  
Technological Zone  
China, 215335  
Phone: +86 512 57155001  
Fax: +86 512 57155059

Europe  
Tieblokkenlaan 1  
B-2300 Turnhout  
Belgium  
Phone: +32 (0)14 40 48 11  
Fax: +32 (0)14 40 48 55

North America  
250 Chester Street  
Painesville, Ohio  
44077 USA  
Phone: +1 866-462-8379  
Fax: +1 888-358-4469